

The diagram shows a 3-phase motor (ファンモーター M) connected to a 3-phase AC supply (AC100V). The motor terminals are labeled: 黒 (強) (Black/Strong), 青 (弱) (Blue/Weak), 赤 (コンデンサ) (Red/Capacitor), and 白 (共通) (White/Common). The AC supply is connected to the motor terminals. A capacitor (コンデンサ 8 μF) is connected between the Red and White lines. Two control switches are connected to the motor terminals. The first switch (入/切) is connected to the Black and Blue lines. The second switch (入/切) is connected to the Red and White lines.

静圧 : Pa

50Hz
60Hz

20m
15m
10m
5m

φ150タクト抵抗曲線

強

弱

風量 : m³/h

入力電圧	(V)	100	
周波数	(Hz)	50/60	
風量調節		強	弱
消費電力	(W)	72/85	51/52
風量	(m³/h)	540/540	380/350
騒音	(dB)	44/45	35/35
質量	(kg)	16	
時間定格		連続	
電動機定格		4極コンデンサ誘導	
電動機絶縁種別		E種	
巻線温度上昇		75K以下	
基準周囲温度		-5～40℃	
絶縁抵抗		1MΩ以上 (DC500V)	
耐電圧		AC1000V 1分間	


番号	部 品 名	材 質	数量	備 考
1	本体	亜鉛めっき鋼板	1	粉体焼付塗装
2	銘板	PET	1	-
3	前面パネル	亜鉛めっき鋼板	1	粉体焼付塗装
4	パンチングフィルター	アルミニウム	1	-
5	ランプカバー	亜鉛めっき鋼板	1	粉体焼付塗装
6	ファン	亜鉛めっき鋼板	1	-
7	スピナー	アルミダイキャスト	1	-
8	モーター	-	1	4極コンデンサー誘導
9	スイッチ	-	2	トグルスイッチ
10	電源コード	-	1	2芯 機外長1m以上
11	レセプタクル	-	1	口金 E26
12	白熱電球	-	1	60W
13	フード	亜鉛めっき鋼板	1	粉体焼付塗装
14	閉じ板	亜鉛めっき鋼板	2	粉体焼付塗装

-


SCALE: 1:15(A3)

□構成表

番号	部 品 名	材 質	数量	備 考
1	後面パネル(WH/BK)	ステンレス鋼板	1	ヘアライン加工
	後面パネル(SUS)	亜鉛めっき鋼板	1	粉体焼付塗装

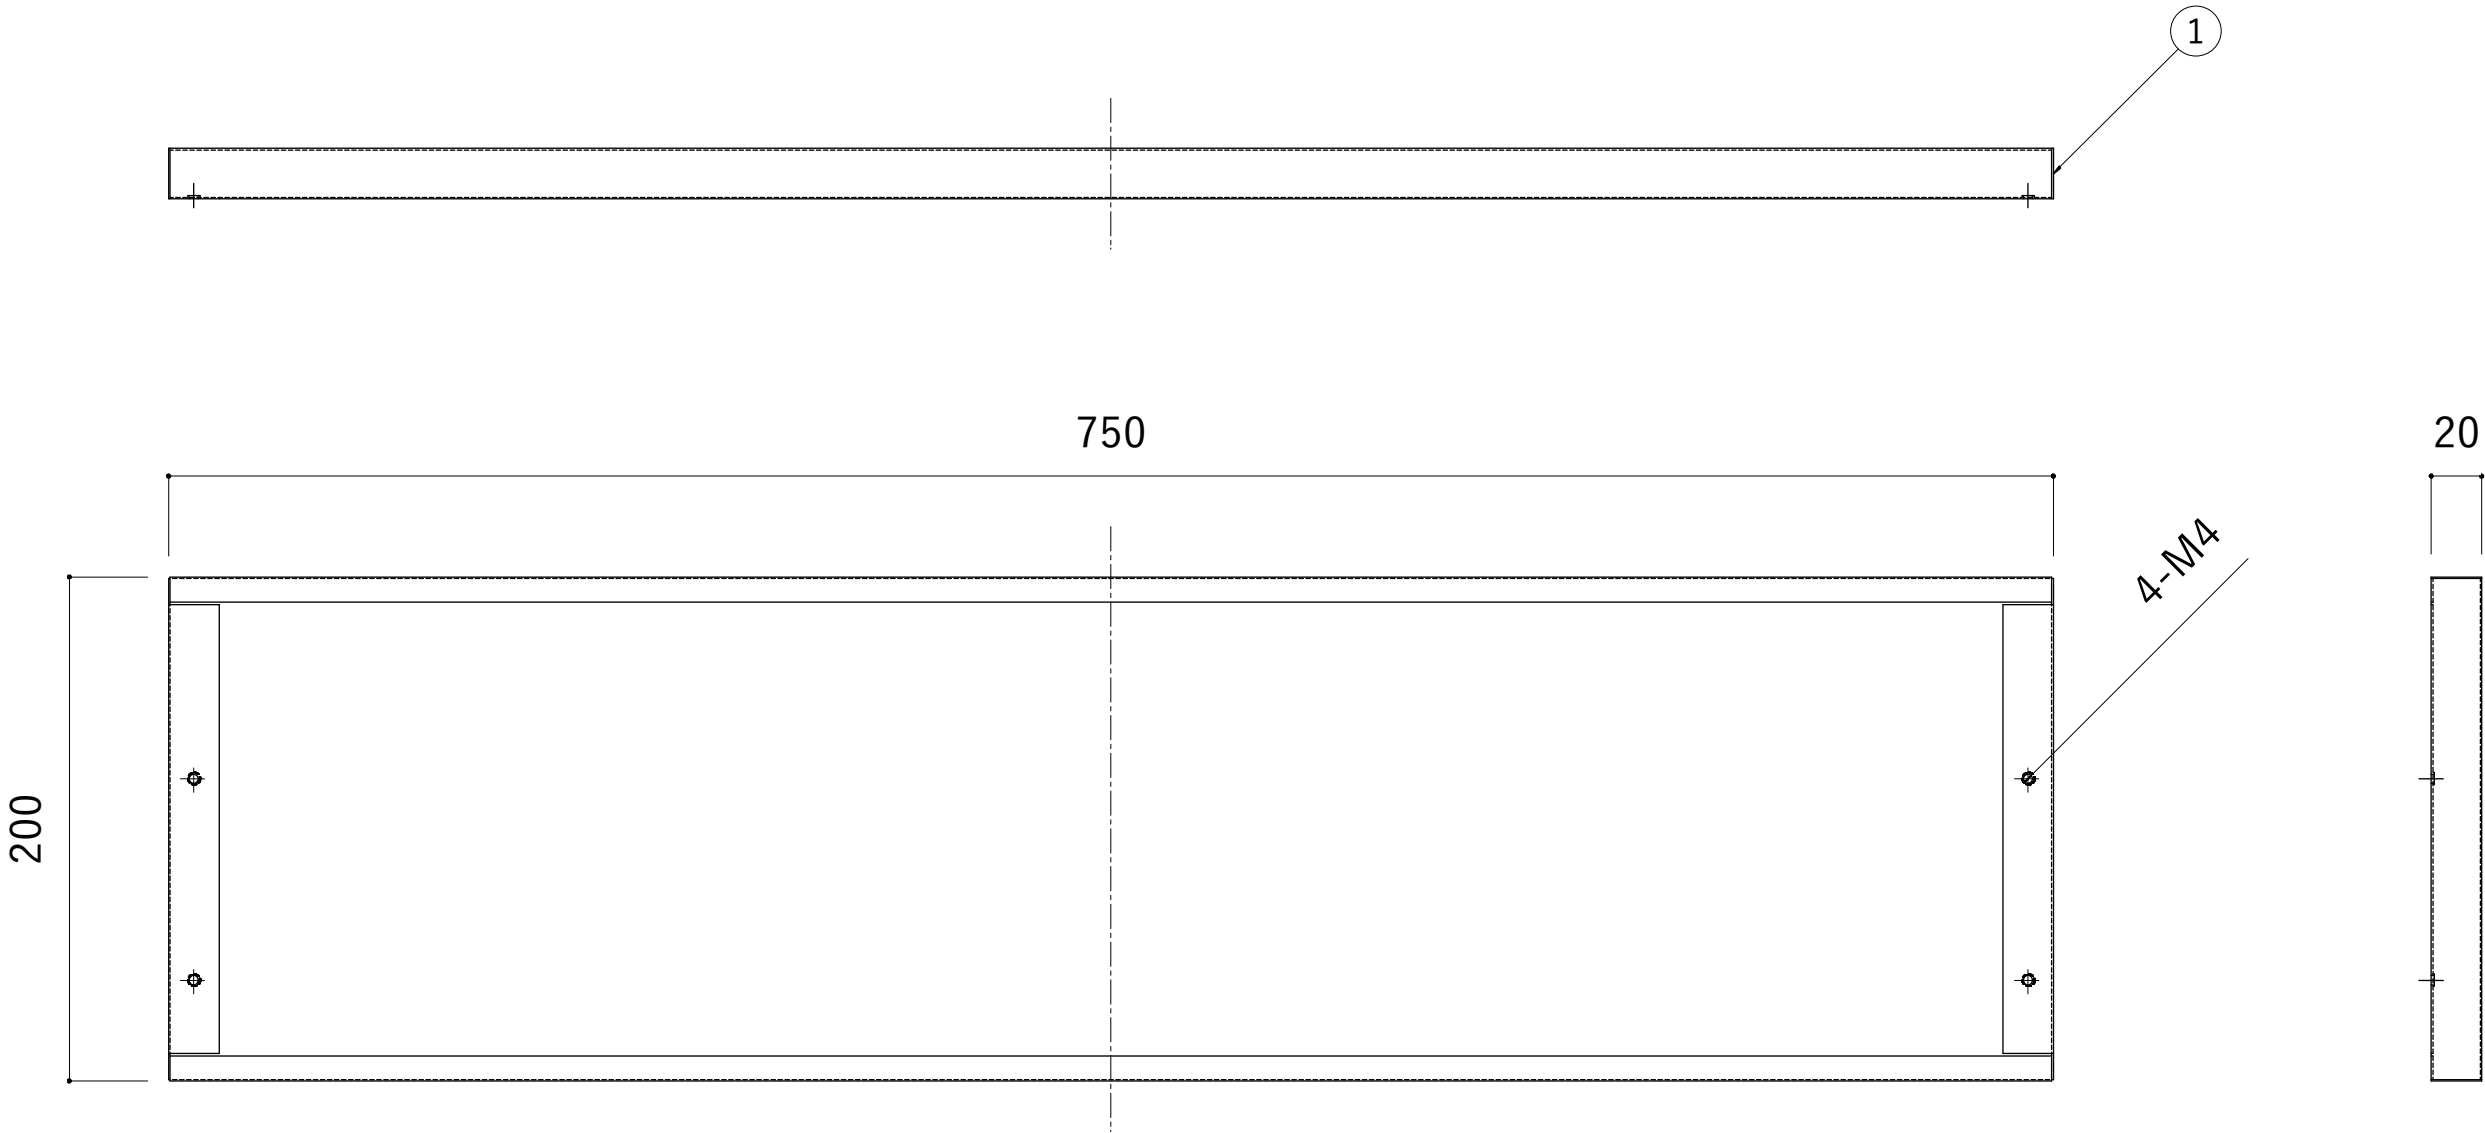

付属品

付属ネジ組

トラスタップタイトネジ (M4×10-4本)

8