

The diagram shows a 3-phase motor (ファンモーター M) connected to a 3-phase AC supply (AC100V). The motor terminals are labeled: 黒 (強) (Black/Strong), 青 (弱) (Blue/Weak), 赤 (コンデンサ) (Red/Capacitor), and 白 (共通) (White/Common). The AC supply is connected to the motor terminals. A capacitor (コンデンサ 8 μF) is connected between the Red and White lines. Two control switches (入/切) are connected to the motor terminals. The first switch controls the Black and Blue lines, and the second switch controls the Red and White lines.

静圧: Pa

50Hz
60Hz

20m
15m
10m
5m

強

弱

φ150タクト抵抗曲線

風量: m³/h

入力電圧	(V)	100	
周波数	(Hz)	50/60	
風量調節		強	弱
消費電力	(W)	72/85	51/52
風量	(m³/h)	540/540	380/350
騒音	(dB)	44/45	35/35
質量	(kg)	16	
時間定格		連続	
電動機定格		4極コンデンサ誘導	
電動機絶縁種別		E種	
巻線温度上昇		75K以下	
基準周囲温度		-5～40℃	
絶縁抵抗		1MΩ以上 (DC500V)	
耐電圧		AC1000V 1分間	

番号	部 品 名	材 質	数量	備 考
1	本体	亜鉛めっき鋼板	1	粉体焼付塗装
2	銘板	PET	1	-
3	前面パネル	亜鉛めっき鋼板	1	粉体焼付塗装
4	パンチングフィルター	アルミニウム	1	-
5	ランプカバー	亜鉛めっき鋼板	1	粉体焼付塗装
6	ファン	亜鉛めっき鋼板	1	-
7	スピナー	アルミダイキャスト	1	-
8	モーター	-	1	4極コンデンサー誘導
9	スイッチ	-	2	トグルスイッチ
10	電源コード	-	1	2芯 機外長1m以上
11	レセプタクル	-	1	口金 E26
12	白熱電球	-	1	60W
13	フード	亜鉛めっき鋼板	1	粉体焼付塗装
14	閉じ板	亜鉛めっき鋼板	2	粉体焼付塗装





- [illegible]

SCALE: 1:15(A3)

A
B
C
D
E
F

12345678

No.	年 月 日 DATE	訂 正 内 容 REVISION	担当 SIGN.
⚠	-	-	-
⚡			

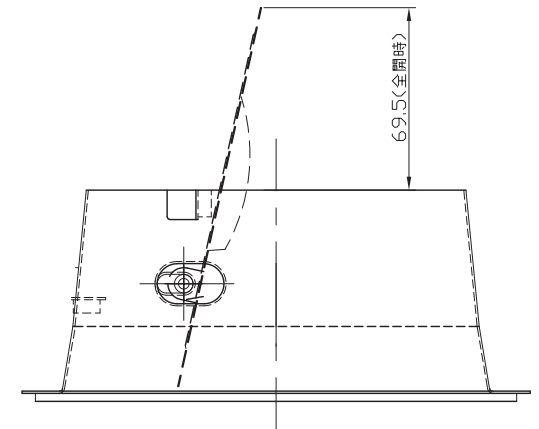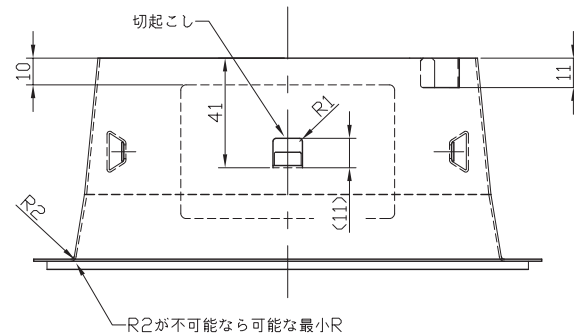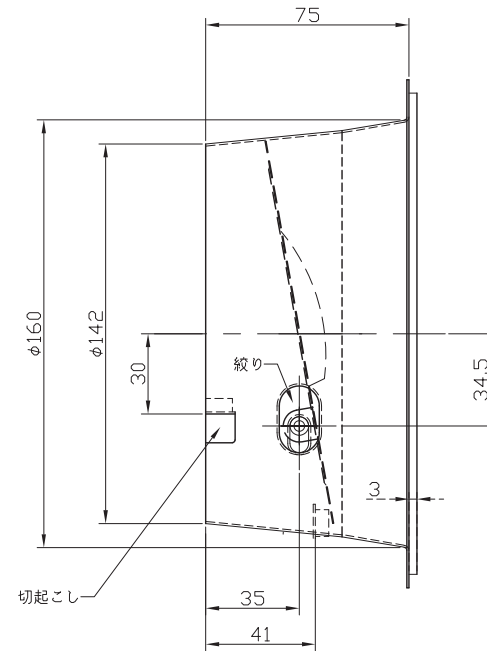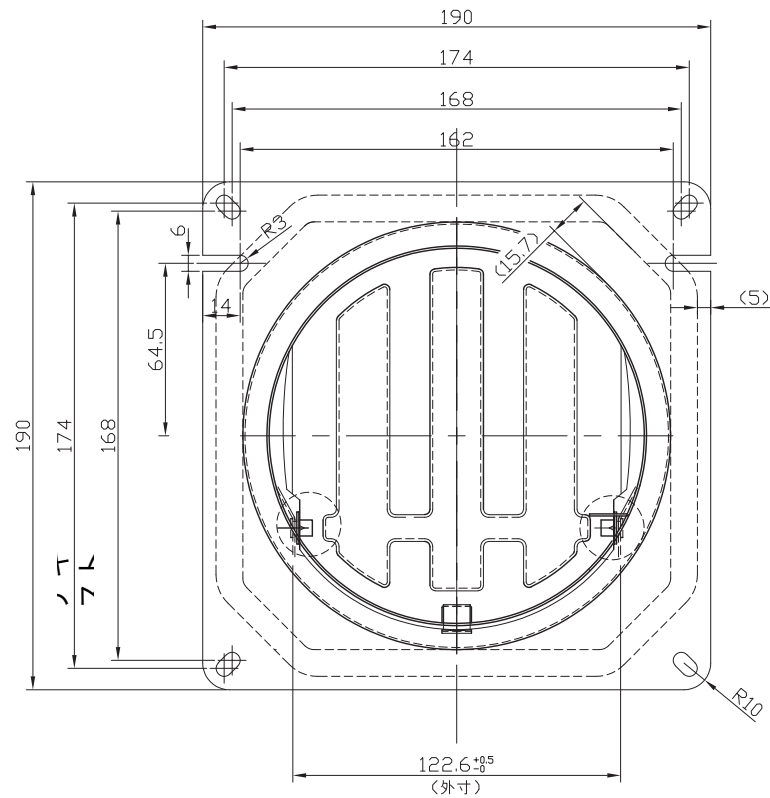

注記

- 指定外の曲げRは、内RでR0.2とする
- 指定外の角Rは、R3とする
- バリなきこと。
- 組付後開閉時、干渉なきこと。

	0.5以上 3以下	3をこえ 6以下	6をこえ 30以下	30をこえ 120以下	120をこえ 400以下	400をこえ 1000以下	1000をこえ 2000以下	2000をこえ 4000以下	角度(度)
(±)									±1
精 級	0.05	0.05	0.1	0.15	0.2	0.3	0.5		
(中 級)	0.1	0.1	0.2	0.3	0.5	0.8	1.2	2	
粗 級	0.2	0.3	0.5	0.8	1.2	2	3	4	
極粗級	—	0.5	1	1.5	2.5	4	6	8	

NO	図 番	名 称	材 質	数量	備 考
材 質 MATERIAL			仕 上 FINISH	製図年月日 DATE	数量 QNT
製図 DRAWING			設計 DESIGNED	確認 CHECKED	承認 APPROVED
**			**	**	**
尺 度 SCALE			機 種 名 MODEL	名 称 NAME	改訂 RE
: 三角法			*****	排気口具(一枚羽)	1
: 三角法			図面番号 DWG. No.	*****	